

FECON® Bull Hog® Skid Steer Pricing

Included with a Skid Steer Unit:

- Universal Skid Steer Mount
- Hydraulic Protection Block
- FGT Rotor System
- Adjustable Grabber Push Bar
- Hydraulic Rotor Brake
- Hydraulic Lines for Motor Drive (Includes Quick Disconnect Fittings)



Model	Overall Width	Working Width	Body Style	Motor	GPM	Weight	Rotor Bearings	List Price	Total with Variable Motor
BH62SS	63"	50"	Skid Steer	1	24 - 45	2050 lbs.	ST65mm	\$23,720	\$26,170
BH74SS	74"	61"	Skid Steer	1	24 - 45	2425 lbs.	ST65mm	\$26,000	\$28,460
BH74SM*	74"	61"	Skid Steer	1	24 - 45	2425 lbs.	ST65mm	\$20,250	n/a
BH85SS	85"	72"	Skid Steer	1	24 - 45	2580 lbs.	ST65mm	\$29,200	\$31,770


Factory Installed Options: (within top level part number)	BH62SS	BH74SS	BH74SM	BH85SS
DCR Rotor w/Samurai Knife-Only	\$2,590	\$2,760	\$2,760	\$3,750
HDT Rotor w/Double Carbide Tools	\$560	\$600	n/a	\$640
Cooling Kit	n/a	\$2,160	n/a	n/a
Pressure Gauge In Motor Cover for BH62SS, BH74SS, BH85SS	\$340	\$340	\$340	\$340
Adjustable Push Bar (Non-Grabber)	\$0	\$0	\$0	\$0

Factory Installed Options: (separate option on the order)	BH62SS	BH74SS	BH74SM	BH85SS
Trap Door for BH62SS, BH74SS, BH85SS	\$1,290	\$1,290	\$1,290	\$1,290
Hose Hanger Kit (074-49-189) - option carrier hose spring kits SS	\$120	\$120	\$120	\$120

Low Flow Control Options: (separate option on the order)		List Price
Single Function Electric/ Hydraulic Valve	To be used when single function is required from the motor circuit because there is no low flow, or when a second function is desired to be taken from the motor circuit on a tractor that already has a low flow for the first low flow function. (part number based on tractor)	\$920
Dual Function Electric/ Hydraulic Valve	To be used when there is no low flow from tractor or when customer prefers both low flow functions be run off the motor circuit of the head. The benefit is that each function flow can be independently regulated and no low flow lines need to be run to the tractor. (part number based on tractor)	\$1,480
Dual Function Electric/ Hydraulic Valve	To be used when low flow is available from the tractor and two low flow functions will be run off the low flow of the tractor with different flow requirements. Flow reducing orifices are installed for the circuit requiring lower flow. Example: hydraulic tilting push bar will require more flow than trap door and trap door will slam if flow is not reduced to trap door. (part number based on tractor)	\$690
Bobcat Controller Single/ Dual Function Electric/ Hydraulic Valve	Optional controller required when a mulcher is equipped with Single Function Electric/ Hydraulic Valve to run a trap door and/or hydraulic push bar on Bobcat tractors with a 7-pin connector. It is not required when the Bobcat is equipped with the less common 14-pin connector. This does not replace the Single Function Electric/ Hydraulic Valve and is an additional requirement. (Field Install - 074-49-125, Factory Install - 074-49-140)	\$330

NOTE:

1. Prices include installation at factory on new units.
2. Buyer is responsible for ensuring carrier has sufficient low flow circuits and controls for options.
3. Actual Weights will vary based on options selected.
4. Please see "Bull Hog® Tooling Pricing" for individual tooling upgrade pricing.
5. *BH74SM only shipped with FGT Samurai knife tool.

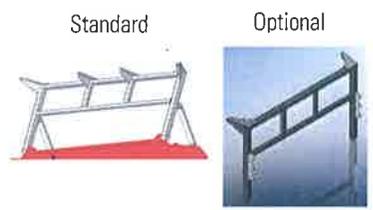

Safety is the responsibility of the operator.
 Prices and specifications subject to change without notice.
 Auxiliary equipment options or attachments not listed, may be quoted upon request.
 Certain guarding and features may have been removed for illustrative purpose, always run with proper guarding.

Fecon® Bull Hog® Hydraulic Ground Pricing

Included with Hydraulic Ground Units:

- Hydraulic Motor(s)
- Push Bar (Configuration Will Vary By Model)
- Hydraulic Protection Kit
- Internal Plumbing
- Integrated Mount (For Most Carriers)
- Trap Door (On Most Models)



Model	Overall Width	Work Width	Body Style	Trap Door	Max HP	GPM	Rotor Bearing	Motors	Weight	List Price
BH74H-3	76"	61"	CSD	Yes	225	27 – 50	SD65mm	1 x 107V	2750 lbs.	\$35,670
BH74H-4	76"	61"	CSD	Yes	225	50 – 65	SD65mm	1 x 160V	2750 lbs.	\$38,790
BH74SD-3 (SS mount)	76"	61"	CSD	Optional	225	27 – 50	SD65mm	1 x 107V	2750 lbs.	\$32,280
BH74SD-4 (SS mount)	76"	61"	CSD	Optional	225	50 – 65	SD65mm	1 x 160V	2750 lbs.	\$36,420
BH74HYB-3*	87"	72"	CSD	Optional	225	27 – 50	SD65mm	1 x 107V	3050 lbs.	\$34,460
BH74HYB-4*	87"	72"	CSD	Optional	225	27 – 50	SD65mm	1 x 160V	2750 lbs.	\$37,580
BH85SD-3 (SS mount)	87"	72"	CSD	Optional	225	27 – 50	SD65mm	1 x 107V	3050 lbs.	\$34,100
BH85SD-4 (SS mount)	87"	72"	CSD	Optional	225	50 – 65	SD65mm	1 x 160V	3050 lbs.	\$38,300
BH85HYB-3*	87"	72"	CSD	Optional	225	27 – 50	SD65mm	1 x 107V	3050 lbs.	\$36,330
BH85HYB-4*	87"	72"	CSD	Optional	225	27 – 50	SD65mm	1 x 160V	2750 lbs.	\$39,450
BH85H-3	87"	72"	CSD	Yes	225	27 – 50	SD65mm	1 x 107V	3050 lbs.	\$37,490
BH85H-4	87"	72"	CSD	Yes	225	50 – 65	SD65mm	1 x 160V	3050 lbs.	\$41,690
BH99H-3	103"	86"	CSD	Yes	225	27 – 50	SD65mm	1 x 107V	4330 lbs.	\$48,680
BH99H-4	103"	86"	CSD	Yes	225	50 – 65	SD65mm	1 x 160V	4330 lbs.	\$53,200
BH120H-1	100"	86"	SD	Yes	300	50–100	SD65mm	2 x 63	5100 lbs.	\$58,350
BH120H-3	100"	86"	SD	Yes	300	50–100	SD65mm	2 x 107	5100 lbs.	\$65,380
BH120H-3 (Phase II**)	100"	86"	SD	Yes	300	50–100	SD65mm	2 x 107V	4800 lbs.	\$65,380
BH120H-4 (Phase II**)	100"	86"	SD	Yes	300	100-140	SD65mm	2 x 160V	4950 lbs.	\$69,070
BH200H-1	102"	85"	SD	Yes	300	50–100	SD65mm	2 x 63	5790 lbs.	\$58,680
BH200H-3	102"	85"	SD	Yes	300	50–100	SD65mm	2 x 107V	5790 lbs.	\$65,720
BH200HxD-1	102"	85"	SD	Yes	350	50–105	SD90mm	2 x 63	5790 lbs.	\$66,770
BH200HxD-3	102"	85"	SD	Yes	350	50–100	SD90mm	2 x 107V	5790 lbs.	\$74,850
BH200HxD-4	102"	85"	SD	Yes	350	100-150	SD90mm	2 x 160V	5790 lbs.	\$78,540
BH300H-1	109"	89"	SD	Yes	300	80–100	SD65mm	2 x 63	7710 lbs.	\$74,920
BH300H-3	109"	89"	SD	Yes	300	80–100	SD65mm	2 x 107V	7710 lbs.	\$79,960
BH300HxD-1	109"	89"	SD	Yes	600	80–105	SD90mm	2 x 63	7710 lbs.	\$81,000
BH300HxD-3	109"	89"	SD	Yes	600	80–100	SD90mm	2 x 107V	7710 lbs.	\$88,960
BH300HxD-4	109"	89"	SD	Yes	600	100–150	SD90mm	2 x 160V	7710 lbs.	\$92,480
BH300HxD-5	109"	89"	SD	Yes	600	180–210	SD90mm	2 x 280V	7710 lbs.	\$105,950
BH350HxD-4	110"	90"	SD	Yes	600	100–150	SD90mm	2 x 160V	8200 lbs.	\$92,860
BH350HxD-5	110"	90"	SD	Yes	600	180–210	SD90mm	2 x 280V	8200 lbs.	\$110,130

NOTE:

- *BH74HYB & BH85HYB are hybrid models for mulching and milling. The heads differ from normal mulchers by having 3" of the rotor exposed below the front section of the skid shoes for improved ground engaging when the head is rolled forward at ground level.
- **Phase II BH120 models provide improved push bar mounting and guarding of the trap door cylinder as well as more accessible grease points, reduced overall weight, curved skid shoes, and the ability to host up to 160cc variable displacement motors.

Safety is the responsibility of the operator.

Prices and specifications subject to change without notice.

Auxiliary equipment options or attachments not listed, may be quoted upon request.

Certain guarding and features may have been removed for illustrative purpose, always run with proper guarding.



Fecon® Bull Hog® Hydraulic Ground Pricing

Factory Installed Options: (within top level part number)	List Price
Hydraulic Tilting Push Bar for BH74H and BH85H Models	\$2,330
Hydraulic Tilting Push Bar for BH99H – BH350H Models	\$2,430
DCR Rotor w/Samurai only for BH74 – All Configurations	\$2,760
DCR Rotor w/Samurai only for BH85 – All Configurations	\$3,750
DCR Rotor w/Samurai only for BH99-120 – All Configurations	\$4,470
DCR Rotor w/Samurai only for BH200 – All Configurations	Coming Soon

Factory Installed Options: (separate option on the order)	List Price
Trap Door for BH74SD, BH85SD, BH74HYB, and BH85HYB Models	\$1,290

NOTE:

1. Maximum flow is based on 6000 PSI operating pressure. Consult factory for custom configurations.
2. Hydraulic horse power should not exceed maximum rated horse power. $(GPM \times PSI) / 1714 = HYD \text{ HP}$.
3. Motors with "V" denote variable displacement motor. Variable displacement motors afford benefit within rated GPM.
4. Actual weights will vary based on motor, mount and options selected.
5. Please see "Bull Hog® Tooling Pricing" for individual tooling upgrade pricing.
6. Labor, parts or materials required for field installations not included. Does not include plumbing to the carrier or controls to activate tilt function. Includes hydraulic tilt cylinders and rake teeth on push bar; all installed at factory.





Fecon® Bull Hog® PTO Pricing

Included with PTO Units:

- Three-Point Hitch
- Push Bar
- Hydraulic Trap Door
- Hydraulic Top Link
- PTO Shaft
- Slip Clutch and Over Running Clutch (in most models)



Model	Width	Work Width	Body Style	Trap Door	Push Bar	HP	PTO RPM	PTO Shaft	Gear Box	Rotor Bearing	Clutch	Weight	List Price
BH74	74"	61"	ST	Yes	PPB	80-90	540	1.375"	Rigid	ST65mm	On PTO Shaft	2600 lbs.	\$27,660
BH74	74"	61"	ST	Yes	PPB	90-40	1000	1.375"	Rigid	ST65mm	On PTO Shaft	2600 lbs.	\$27,660
BH85	85"	72"	ST	Yes	PPB	80- 90	540	1.375"	Rigid	ST65mm	On PTO Shaft	3000 lbs.	\$29,000
BH85	85"	72"	ST	Yes	PPB	90-140	1000	1.375"	Rigid	ST65mm	On PTO Shaft	3000 lbs.	\$29,000
BH99	101"	86"	ST	Yes	PPB	90-140	1000	1.75"	Rigid	ST65mm	On PTO Shaft	4300 lbs.	\$34,870
BH120-P	100"	86"	SD	Yes	HYB	140-185	1000	1.75"	Pivoting	SD65mm	On PTO Shaft	4900 lbs.	\$52,420
BH200-P	102"	85"	SD	Yes	HYB	140-185	1000	1.75"	Pivoting	SD90mm	On PTO Shaft	6000 lbs.	\$56,000
BH200-PX	102"	85"	SD	Yes	HYB	140-450	1000	1.75"	Pivoting	SD90mm	Inside Head	6000 lbs.	\$63,620
BH300-PX	109"	89"	SD	Yes	HYB	200-450	1000	1.75"	Pivoting	SD90mm	Inside Head	7800 lbs.	\$76,560
BH300-PX HYBRID	108"	89"	SD	Yes	HYB	200-350	1000	1.75"	Pivoting	SD65mm	Inside Head	7900 lbs.	\$80,790
BH350-P	110"	89"	SD	Yes	HYB	250-450	1000-1325	1.75"	Pivoting	SD90mm	None	8200 lbs.	\$97,130

Factory Installed Options: (within top level part number)	List Price
Hydraulic Tilting Push Bar for BH74 and BH85 Models	\$2,330
Hydraulic Tilting Push Bar for BH99 Models	\$2,430
DCR Rotor w/Samurai only for BH74 – All Configurations	\$2,760
DCR Rotor w/Samurai only for BH85 – All Configurations	\$3,750
DCR Rotor w/Samurai only for BH99-120 – All Configurations	\$4,470
DCR Rotor w/Samurai only for BH200 – All Configurations	Coming Soon

NOTE:

1. BH200, BH300, BH350 and H600-P units require gear box cooling over 300HP. Call for quote.
2. BH200, BH300 and BH350 units come equipped as standard with hydraulic tilting push bar.
3. Models with "P" in the model name have a pivoting gear box and synchronization bar.
4. Models without "P" in model name have fixed-position gear boxes.
5. Actual Weights will vary based on options selected.
6. Please see "Bull Hog® Tooling Pricing" for individual tooling upgrade pricing.
7. Labor, parts or materials required for field installations not included. Does not include plumbing to the carrier or controls to activate tilt function.

Safety is the responsibility of the operator.

Prices and specifications subject to change without notice.

Auxiliary equipment options or attachments not listed, may be quoted upon request.

Certain guarding and features may have been removed for illustrative purpose, always run with proper guarding.



Fecon® Bull Hog® Excavator Pricing

Included with Excavator Units:

- Hydraulic Motor(s)
- Hydraulic Protection Kit
- Internal Plumbing From Motor(s) to The Bulkhead and Protection Block
- Mount Riser For Weld-On or Pin-On Mount Plate
- Weld-On or Bolt-On Mount



Model	Overall Width	Work Width	Max HP	GPM	Rotor Bearing	Motors	Weight	EXC Class***	List Price
CEM36(*) (**)	52"	36"	90	17 – 30	ST65mm	1 x 55V*	1200 lbs.	7 – 15 t	\$21,590
Standard Duty									
BH47EXC-1	50"	37"	170	27 – 50	ST65mm	1 x 63	2085 lbs.	12 – 20 t	\$33,190
BH47EXC-2V	50"	37"	170	27 – 50	ST65mm	1 x 107V	2085 lbs.	12 – 20 t	\$37,820
BH47EXC-3V	50"	37"	170	40 – 70	ST65mm	1 x 160V	2085 lbs.	12 – 20 t	\$39,850
BH62EXC-1	63"	50"	170	27 – 50	ST65mm	1 x 63	2540 lbs.	12 – 20 t	\$35,650
BH62EXC-2V	63"	50"	170	27 – 50	ST65mm	1 x 107V	2540 lbs.	12 – 20 t	\$39,920
BH62EXC-3V	63"	50"	170	40 – 70	ST65mm	1 x 160V	2540 lbs.	12 – 20 t	\$43,530
Severe Duty									
BH40EXC-1-SD**	51"	36"	250	30 – 57	SD65mm	1 x 63	3050 lbs.	15 – 40 t	\$36,720
BH40EXC-1-2-SDV**	51"	36"	250	30 – 50	SD65mm	1 x 107V	3050 lbs.	15 – 40 t	\$42,780
BH40EXC-3-SDV**	51"	36"	250	40 – 70	SD65mm	1 x 160V	3050 lbs.	15 – 40 t	\$46,690
BH80EXC-1**	71"	56"	250	38 – 57	SD65mm	1 x 63	4000 lbs.	20 – 40 t	\$47,860
BH80EXC-1-SDV**	71"	56"	250	38 – 50	SD65mm	1 x 107V	4000 lbs.	20 – 40 t	\$49,680
BH80EXC-2-3-SDV**	71"	56"	250	50 – 75	SD65mm	1 x 160V	4000 lbs.	20 – 40 t	\$59,830
BH80EXC-4-SDV**	71"	56"	250	50 – 105	SD65mm	2 x 107V	4000 lbs.	20 – 40 t	\$62,290
BH80EXC-5SDV	71"	56"	250	80-105	SD65mm	2x160V	4000 lbs.	20 – 40 t	\$65,710
BH200EXCXD-1-SDV**	77"	59"	300	38 – 50	SD90mm	1 x 107V	4210 lbs.	20 – 40 t	\$56,730
BH200EXCXD-2-SDV**	77"	59"	600	50 – 75	SD90mm	1 x 160V	4210 lbs.	20 – 40 t	\$59,940
BH200EXCXD-3-SDV**	77"	59"	600	50 – 105	SD90mm	2 x 107V	4210 lbs.	20 – 40 t	\$66,140
BH200EXCXD-4-SDV**	77"	59"	600	100 – 150	SD90mm	2 x 160V	4210 lbs.	20 – 40 t	\$69,560

NOTE:

1. Maximum flow is based on 6000 PSI operating pressure. Consult factory for custom configurations.
2. Hydraulic horse power should not exceed maximum rated horse power. (GPM x PSI)/1714=HYD HP)
3. Models ending in "V" denote variable displacement motor.
4. t = Metric Ton
5. Actual weights will vary based on motor, mount and options selected.
6. CEM36 weight includes typical mount. All other models do not reflect weight of mount. Mounts can average 350 lbs. Quick Attach mounts for excavators over 25 tons can weigh significantly more.
7. Please see "Bull Hog® Tooling Pricing" for individual tooling upgrade pricing.
8. *CEM36 55cc variable displacement motor affords shift benefit up to 24gpm. Flows from 25-30 gpm operate at full displacement.
9. **Designates mulching attachment capability of adding the CEM thumb receiver option.
10. *** Common excavator suggestions are preliminary; always consult your excavator's actual lifting capacity.

Safety is the responsibility of the operator.

Prices and specifications subject to change without notice.

Auxiliary equipment options or attachments not listed, may be quoted upon request.

Certain guarding and features may have been removed for illustrative purpose, always run with proper guarding.



Operator cab must be protected with properly maintained ½" LEXAN® glass or equal. Always ensure your carrier's safety features, including ROPs & FOPs, meet your job safety requirements.

Fecon® Bull Hog® Excavator Pricing

Factory Installed Options: (add to mulcher pricing)	
DCR Rotor w/ Samurai only for CEM36	\$1,710
DCR Rotor w/ Samurai only for BH40, BH47	\$1,710
DCR Rotor w/Samurai only for BH62EXC	\$2,590
DCR Rotor w/Samurai only for BH80EXC	\$2,760
DCR Rotor w/Samurai only for BH200EXC	\$3,120
Thumb Receiver: BH40 & BH80 - Severe duty models only. Use existing excavator thumb in conjunction with this to pick up and move logs, rocks, and debris.	\$1,960

Factory Installed Options: (separate line item on the order)		Part Number	List Price
CEM Thumb Receiver	Rigid end plate angled and reinforced to receive excavators thumb. Use existing excavator thumb in conjunction with this to pick up and move logs, rocks, and debris.	502-49-005	\$990
Indexer	Allows rotation and/or operation of mulcher at various angles	n/a	Call
Universal Adaptor Plate	Pins onto riser of head with flat top. Optional mount or quick coupler can be welded.	40063-76	\$800
Lexan Kit	Excavator cab forestry guard	508-06-004	\$1,875
12-50 Ton Mount	Mount specs determine part number for mount.	TBD	Call
CEM36 Mount	Mount specs determine part number for mount.	TBD	Call

Optional Deduction: (within top level part number)	
12-50 Ton Mount deduction from list price	(\$2,500)
CEM36 Mount deduction from list price	(\$730)

Safety is the responsibility of the operator.
 Prices and specifications subject to change without notice.
 Auxiliary equipment options or attachments not listed, may be quoted upon request.
 Certain guarding and features may have been removed for illustrative purpose, always run with proper guarding.





Operator cab must be protected with properly maintained ½" LEXAN® glass or equal. Always ensure your carrier's safety features, including ROPs & FOPs, meet your job safety requirements.

Fecon® Power Pack Pricing



Model	Description	Hydraulic Flow	List Price
BHP170	170hp Cummins	61 gpm	\$77,960
BHP270	270hp Cummins	105 gpm	\$101,860

BHP170 12-20 ton	BHP170 20 ton & up	BHP270 20 ton & up
BH47EXC-3V	BH40EXC-3SDV	BH80EXC-4SDV
BH62EXC-3V	BH80EXC-2	BH200XD-3SDV
BH40EXC-3SDV	BH80EXC-2-3-SDV	BH200XD-4SDV
SH360-61	BH200EXC-2SD	SH360-100
-	SH360-61	-

NOTE:

1. Other mulching attachment options available. Contact your Fecon® representative with any questions about your application.
2. Always consider the weight of the attachment with the carrier.
3. Refer to Bull Hog® and Stump Hog® price pages for excavator attachment pricing.
4. Bull Hog® Excavator and BHP prices do not include installation, line groups or excavator guarding.
5. Completed Fecon® data forms are required to keep the project on schedule and to help streamline installation.
6. Additional counterweight may be required for BHP installation on some excavators. Consult your Fecon® representative for pricing and applications.

Safety is the responsibility of the operator.
 Prices and specifications subject to change without notice.
 Auxiliary equipment options or attachments not listed, may be quoted upon request.
 Certain guarding and features may have been removed for illustrative purpose, always run with proper guarding.





Operator cab must be protected with properly maintained ½" LEXAN® glass or equal. Always ensure your carrier's safety features, including ROPs & FOPs, meet your job safety requirements.

Fecon® Bull Hog® Tooling Pricing


Rotor Type	Tool Description	Part Number	Additions or Deductions to Convert Rotor from Standard Tools					
			Tool Quantity in Head					
HDT	Standard Double Carbide HDT Tool	BH46HDT01A						
HDT	Chipper Knife Holder, HDT	BH46HM017						
HDT	Chipper Knife	BH46HM028.02	18	24	30	36	48	
HDT	Chipper Knife & Holder Assembly, HDT	N/A	-\$34	-\$45	-\$57	-\$68	-\$90	
HDT	Single Carbide HDT Tool	BH46HDT02A	-\$132	-\$177	-\$221	-\$265	-\$353	
HDT	Stone/Rock HDT Tool	BH46HDT03A	+\$223	+\$297	+\$371	+\$445	+\$594	
HDT	Rotorvator Tool (Soil Hog)	BH46HDT04V	+\$223	+\$297	+\$371	+\$445	+\$594	
FGT	Tool, FGT Standard Duty	320-15-012	-	-	-	-	-	
FGT	Samurai Knife Tool Knife	320-14-050	-\$825	-\$1,100	-\$1,375	-\$1,650	-\$2,200	
FGT	Tool, FGT Severe Duty	320-15-011	+\$553	+\$737	+\$922	+\$1,106	+\$1,475	
FGT	Tool, Stone	320-15-013	+\$1,140	+\$1,520	+\$1,900	+\$2,280	+\$3,041	

Tool Quantity for Standard Models	16	18	24	26	28	30	36	42	48
CEM36 # / CEM36 – DCR X	X	#							
BH47EXC # / BH47EXC - DCR X	X	#							
BH62 – All # / BH62 – All – DCR X			# X						
BH74 – All # / BH74 – All – DCR X						# X			
BH80 – All # / BH80 – All – DCR X				X		#			
BH85 – All # / BH85 – All – DCR X							# X		
BH99 – All #									#
BH120 – All # / BH120 – All – DCR X								X	#
BH200EXC All # / BH200EXC –All- DCR					X	#			
BH200 Ground (Wide Body) # / DCR X								X	#
BH300 – All #									#

NOTE:

1. FGT Rotors w/ standard tools have 1 SD tool at each end of the rotor.
2. There are no tool options for DCR.

HDT Rotor System Tool Choices

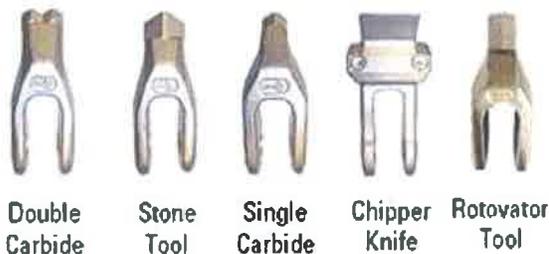

FGT Rotor System Tool Choices



Safety is the responsibility of the operator.
 Prices and specifications subject to change without notice.
 Auxiliary equipment options or attachments not listed, may be quoted upon request.
 Certain guarding and features may have been removed for illustrative purpose, always run with proper guarding.



Fecon® FTX100-L Pricing

Model	Undercarriage	List Price
FTX100-LGP	Heavy Duty Steel Track – 16" or 20" Single Grouser	\$145,000



FTX100 – Specifications

Specifications	
Engine	Kubota V3800DI-T
Horse Power	99hp
Ground Pressure with Bull Hog	4.1 psi – 5.4 psi
Weight with Bull Hog	14,950 lbs.
Fuel Consumption	6 - 8 gph
Hydraulic Pressure	5500 psi / 39 gpm
Reversing Fan	Hydraulic and Engine Auxiliary Radiator

FTX100 – Factory Installed Options

Part Number	Description	List Price
Reference Part #	Triple Grouser Track Shoes	\$2,035
FTX-STW100	Winch – 12,000 lbs. line pull,	\$6,100
FTX-SKW100	Skidder Arch (added to winch)	\$1,380
FTX-100-OPT-001	Rear View Camera	\$2,340
FTX-100-OPT-002	Cold Weather Package*	\$1,850

FTX100 – Attachments

Model	Description	List Price
BH74SS	Bull Hog – BH74SS w/107cc Variable Motor Option	\$28,460
BH85SS	Bull Hog – BH85SS w/107cc Variable Motor Option	\$31,770
SH260	Stump Hog	\$15,630
FBSD1400SS	Tree Shear - Single Acting	\$13,560
FBSD1500SS	Tree Shear - Dual Acting	\$15,570
FRG72	Root Grapple Rake, 72"	\$ 3,440
FBG72	Grapple Bucket, 72"	\$ 3,440
FFG60	Front rotating grapple, 60", without winch	\$ 6,800

NOTE:

1. Please see Bull Hog Skid Steer page for options.
2. Options on Bull Hog may require additional valve and hose kit.
3. *Plug in heater for oil pan, engine block, hydraulic tank and cold weather oil.



Operator cab must be protected with properly maintained ½" LEXAN® glass or equal. Always ensure your carrier's safety features, including ROPs & FOPs, meet your job safety requirements.

Fecon® FTX128-L Pricing

Description	List Price
FTX128 base machine with single grouser tracks	\$182,000
FTX128 base machine with Fecon mulcher combo discount(*)(**)	\$152,260



FTX128L – Specifications

Specifications	
Engine	Cummins QSB 4.5 Tier III
Horsepower	128hp
Ground Pressure	3.7 psi - 4.5 psi***
Weight w/ Bull Hog	16,923 lbs. to 17,613 lbs.***
Fuel Consumption	3.5 - 4.5 gph
Implement Drive	4500 psi / 60 gpm
Reversing Fan	Hydraulic and Engine

FTX128L – Factory Installed Options

Part Number	Description	List Price
FTX128-OPT-001	Rear View Camera Factory Installed	\$ 1,430
FTX128-OPT-002	Rear View Camera Field Installed	\$ 1,074
FTX128-OPT-003	15,000 Line Pull Hydraulic Winch	\$ 8,120
FTX128-OPT-004	Auxiliary Engine and Hydraulic Heater	\$ 7,280
FTX128-OPT-005	Remote Pressure Adjustment (in Cab)	\$ 1,540
FTX128-OPT-007	Severe Duty HVAC Pre-Cleaner	\$ 1,810
FTX128-OPT-008	Positive Air Shut Off Valve Factory Installed	\$ 2,930
Ref Tractor Part #	20" Triple Grouser Track Shoes	\$ 2,350

FTX128L – Attachments and Attachment Options

Model	Description	List Price
BH74SD-4	BH74SD w/ 160 Variable Speed Motor	\$36,420
BH85SD-4	BH85SD w/ 160 Variable Speed Motor	\$38,300
SH260-128****	Stump Grinder (40.44.9 gpm without controls)	\$15,630
FBSD1500-128	Dual Acting Tree Shear	\$15,570
FGR72-128	Root Grapple Rake 72"	\$ 3,440
FBG72-128	Grapple Bucket 72"	\$ 3,440
FFG60-128	Front Rotating Grapple 60" w/o Winch	\$ 6,800
FRM76-42-128****	Deck Mower with Cross Disk	\$10,430
FRM76-A-42-128****	Deck Mower with Round Disc	\$10,990

NOTE:

1. Please see Bull Hog Skid Steer page for options.
2. Options on Bull Hog may require additional valve and hose kit.
3. *Only available when sold with a BH85SD-4 or BH74SD-4 head attached.
4. ** Cannot be combined with any other special offers.
5. ***Depending on track and Bull Hog choice.
6. **** Requires remote pressure adjustment (in cab).

Safety is the responsibility of the operator.

Prices and specifications subject to change without notice.

Auxiliary equipment options or attachments not listed, may be quoted upon request.

Certain guarding and features may have been removed for illustrative purpose, always run with proper guarding.





Operator cab must be protected with properly maintained ½" LEXAN® glass or equal. Always ensure your carrier's safety features, including ROPs & FOPs, meet your job safety requirements.

Fecon® FTX250 Pricing

Model	Undercarriage	List Price
FTX250-SLGP	Cross Link Track – 33"	\$315,320



FTX250 – Specifications

Specifications	
Engine	Cummins QSC8.3L
Horse Power	250 hp
Ground Pressure with Bull Hog	3.9 psi
Weight with Bull Hog	30,270 lbs.
Fuel Consumption	10-12 gph
Implement Drive	6000 psi / 75gpm
Reversing Fan	Hydraulic and Engine

FTX250 – Factory Installed Options

Part Number	Description	List Price
FTX250-OPT-001	Arctic Package*	\$ 9,470
Ref Tractor Part #	Rear View Camera	Standard
Ref Tractor Part #	Winch – 20,000 lbs. line pull, 150ft of 5/8" cable	Standard

FTX250 – Attachments

Model	Description	List Price
BH120H-3	Bull Hog – with 2 x 107cc Variable Motor Option	\$65,380
BH200H-1	Bull Hog - with 2 x 63cc Motor Option	\$58,680
BH200H-3	Bull Hog - with 2 x 107cc Variable Motor Option	\$65,720

NOTE:

- *Auxiliary engine and hydraulic heater and cold weather oils.

Safety is the responsibility of the operator.
 Prices and specifications subject to change without notice.
 Auxiliary equipment options or attachments not listed, may be quoted upon request.
 Certain guarding and features may have been removed for illustrative purpose, always run with proper guarding.





Fecon® FTX290 Pricing

Description	List Price
FTX290 base machine with 30" single grouser tracks	\$343,700
FTX290 base machine with Fecon mulcher combo discount(*)(**)	\$332,800



FTX 290 – Specifications

Specifications	
Engine	Cummins qsc 8.3 Tier III
Horse Power	290hp/ 216 KW
Ground Pressure with Bull Hog	3.3 psi / .232 kg/cm ²
Weight with Bull Hog	28,250 lbs. / 12,814 kg
Fuel Consumption	14-18 gph / 52-68lph
Implement Drive	101 gpm / 6000 psi
Reversing Fan	Engine and Hydraulic

FTX290 – Factory Installed Options

Part Number	Description	List Price
FTX290-OPT-001	Winch Option 15,000lb hydraulic	\$6,350
FTX290-OPT-002	Aux Engine and Hyd heater option	\$9,360
FTX290-OPT-004	Positive Air Shut Down Option	\$3,680
FTX290-OPT-008	BC Windshield Option 1.25"	\$6,350

FTX290 – Attachments

Model	Description	List Price
Phase II BH120-4	BH 120- Bull Hog with 2 x 160cc Variable Speed Motors***	\$69,070
Reference Part #	Hydraulic Tilting Push Bar For BH99H – BH350H Models	\$2,430

NOTE:

1. *Only available when sold with a Phase II BH120H-4 head attached.
2. ** Cannot be combined with any other special offers.
3. ***Hydraulic push bar required.





Fecon® FTX400LGP Pricing

Description	List Price
FTX400LGP base machine with 30" single grouser tracks	\$430,440
FTX400LGP base machine with Fecon mulcher combo discount(*)(**)	\$407,770



FTX400LGP – Specifications

Specifications	
Engine	Cummins QSM 11 Tier III
Horse Power	403 hp / 300 kW
Ground Pressure with Bull Hog	3.8 psi / .267 kg/cm ²
Weight with Bull Hog	34,290 lbs. / 15,555 kg
Fuel Consumption	18-22 gph / 68-83 lph
Implement Drive	152gpm / 5510 psi
Reversing Fan	Engine and Hydraulics

FTX400LGP – Factory Installed Options

Part Number	Description	List Price
FTX400LGP-OPT-001	30,000 lb. Line Pull Hydraulic Winch	\$9,550
FTX400LGP-OPT-002	Arctic Weather Package***	\$8,920
FTX400LGP-OPT-005	Positive Air Shut Off Valve	\$3,685

FTX400LGP – Attachments

Model	Description	List Price
BH200HXD-4	BH200 Bull Hog with 2 x 160cc Variable Speed Motors****	\$78,540
BH300HXD-4	BH300 Bull Hog with 2 x 160cc Variable Speed Motors****	\$92,480
Reference Part #	Hydraulic Tilting Push Bar For BH99H – BH350H Models	\$2,430

NOTE:

1. *Only available when sold with a BH200HXD-4 or BH300HXD-4 head attached.
2. ** Cannot be combined with any other special offers.
3. ***Auxiliary engine and hydraulic heater, engine shut off valve and cold weather oils.
4. ****Hydraulic push bar required.

Safety is the responsibility of the operator.

Prices and specifications subject to change without notice.

Auxiliary equipment options or attachments not listed, may be quoted upon request.

Certain guarding and features may have been removed for illustrative purpose, always run with proper guarding.





Fecon® FTX600 Pricing

Description	List Price
FTX600 base machine with 32" single grouser tracks	\$532,950
FTX600 base machine with Fecon mulcher combo discount(*)(**)	\$502,600



FTX600 – Specifications

Specifications	
Engine	Cummins QSX15 Tier III diesel
Horse Power	600 hp
Ground Pressure with Bull Hog	5.9 psi
Weight with BH300 Bull Hog	54,380 lbs.
Fuel Consumption	20 - 24 gph
Implement Drive	Hydraulic 188 gpm / 5800 psi
Reversing Fan	Hydraulic and Engine

FTX600 – Factory Installed Options

Part Number	Description	List Price
450-90-001	50,000 lb. Line Pull Hydraulic Winch***	\$19,430
450-90-002	Full Length Track Rock Guards	\$5,230
450-90-003	Arctic Weather Package****	\$9,450
450-90-004	Positive Air Shut Off Valve	\$3,980
450-90-005	Aux. Fuel Filter/ Separator (Non North America)	\$3,860
450-90-006	LED Lighting Package (12 additional light LED)	\$3,990
Ref Tractor Part #	Rear View Camera	Standard
Ref Tractor Part#	Double Grouser Track Shoes	\$3,490
Ref Tractor Part#	Triple Grouser Track Shoes	\$3,490

FTX600 – Attachments

Model	Description	List Price
BH300HXD-5	Bull Hog – BH300 w/2 280 Variable Speed Motors*****	\$105,950
BH350HXD-5	Bull Hog – BH350 w/2 280 Variable Speed Motors*****	\$110,130
Reference Part #	Hydraulic Tilting Push Bar For BH99H – BH350H Models	\$2,430

NOTE:

- *Only available when sold with a BH300HXD-5 or BH350HXD-5 head attached.
- ** Cannot be combined with any other special offers.
- ***Winch option weight is 1990 lbs.
- ****Auxiliary engine and hydraulic heater, engine shut off valve and cold weather oils.
- *****Hydraulic pushbar required.

Safety is the responsibility of the operator.

Prices and specifications subject to change without notice.

Auxiliary equipment options or attachments not listed, may be quoted upon request.

Certain guarding and features may have been removed for illustrative purpose, always run with proper guarding.





Operator cab must be protected with properly maintained ½" LEXAN® glass or equal. Always ensure your carrier's safety features, including ROPs & FOPs, meet your job safety requirements.

Fecon® RTF230 Pricing

Description	List Price
4WD x 4WS Rubber Tired Carrier	\$230,400



RTF230 – Specifications

Specifications	
Engine	Perkins 1106D
Horse Power	230 hp / 168kw
Travel Speed	0-24mph / 0-40km/h
Operating Weight	18,400lbs / 8346kg
Fuel Consumption	8-10 gph / 30-37lph
Implement Drive	75gpm/6000psi • 283lpm/413bar
Turning Radius	14' 7" / 4445mm

RTF230 – Attachments

Model	Description	List Price
Phase II BH120-3	BH120- Bull Hog with 2 x 107cc Variable Speed Motors*	\$65,380
Reference Part #	Hydraulic Tilting Push Bar For BH99H – BH350H Models	\$2,430

NOTE:

- *Hydraulic push bar required.

Safety is the responsibility of the operator.
 Prices and specifications subject to change without notice.
 Auxiliary equipment options or attachments not listed, may be quoted upon request.
 Certain guarding and features may have been removed for illustrative purpose, always run with proper guarding.




Fecon® Deck Mower Pricing

FRM76 offers a full 72" working width and can run on skid steer power as low as 21gpm and up to 45gpm. It does not require a case drain hydraulic connection and installation on any appropriately sized skid steer is plug-and-go. It offers both a cross and round disk blade carrier to match customer preference. The FRM76's bi-directional rotation allows for control of the discharge to the desired side and eliminates the need to "flip" the double sided rotary axe blades. The front chained intake door lifts to cut larger material and the smooth deck surface promotes minimal debris buildup. The robust construction of the FRM76 includes the thickest wall components in the industry and replaceable AR400 steel skid shoes providing for optimum service life.



FRM76

FRM76-A



CROSS

DISK

Model	Hydraulic Requirement	Cutting Width	Overall Width	Overall Height	Overall Length	Blades	Weight	Hoses	List Price
FRM76 Cross Disk	21-45 gpm Up to 4100 PSI Max	72"	86"	35"	88"	4 – 15" Dual Side Rotary Axe Blades	2,100 lbs.	1" dia. w/ QD Couplers	\$10,430
FRM76-A Round Disk	21-45 gpm Up to 4100 PSI Max	72"	86"	35"	88"	4 – 15" Dual Side Rotary Axe Blades	2,400 lbs.	1" dia. w/ QD Couplers	\$10,990

Model Number	Motor Configuration
FRM76/-A-21	19 - 22 gpm
FRM76/-A-23	23 - 26 gpm
FRM76/-A-27	27 - 31 gpm
FRM76/-A-32	32 - 35 gpm
FRM76/-A-36	36 - 40 gpm
FRM76/-A-42	31 - 45 gpm

Part Number	Description	List Price
FRM-85528	Blade replacements, set of 2	\$103.95
FRM-84365	Blade Bolt, set of 2	\$37.54
FRM-84363	Blade Nut, set of 2	\$15.15

NOTE:

1. No case drain required.

Safety is the responsibility of the operator.
 Prices and specifications subject to change without notice.
 Auxiliary equipment options or attachments not listed, may be quoted upon request.
 Certain guarding and features may have been removed for illustrative purpose, always run with proper guarding.



Fecon® Log Jaw™ Wood Splitter Pricing

Eliminate wood waste and improve chipper performance with Fecon's Log Jaw™ Wood Splitter attachment for skid steers and 8-16 ton excavators. The Log Jaw will rip apart long, large diameter logs and stumps into manageable pieces for faster chipping, grinding, and firewood processing. The Log Jaw attachment has a 40" jaw opening (tip to tip) and 90° of rotation, allowing the operator to attack oversized wood from multiple angles. A mount can be built to meet the specifications of your excavator.



Fecon® Skid Steer Log Jaw™ Pricing

Model	Height	Weight (with mount)	Jaw Opening	Ideal Carrier Size	List Price
LJSS-40*	51.25"	1750	40"	75+ Horse Power	\$15,580

Fecon® Excavator Log Jaw™ Pricing

Model	Height	Weight (w/o mount)	Jaw Opening	Ideal Carrier Size	GPM	PSI	List Price
LJEXC-40**	80"	995 lbs.	40"	8-16 Ton	15-27	3000-4000	18,250

- NOTE:**
- *Includes hoses and fittings. "Plug and go" set up.
 - **Includes mount for most excavators. A mount data form is required to fit excavator and verify price.





Fecon® Stump Hog Pricing

Grind stumps with extreme mobility using compact track loaders or skid steers, or work large areas and difficult slopes with an excavator mounted stump grinder. Fecon's SH260 is the ideal Stump Hog for high horse power and high flow skid steers. Offering swing, plus in/out and up/down features operators do not have to lift, tilt or track while stumping. At 1640 lbs. and a 26" wheel, this Stump Hog is ideal for Skid Steers. The SH360 Excavator Stumper mounts to any 20+Ton excavators via a bolt-on mount custom fit to the particular excavator. Hydraulics and drive train can be set up for the power provided by the excavator in the 40-65gpm range and up to 5500psi. For ultimate performance the SH360 can be set up for the Fecon BHP170 and BHP250 self-contained Powerpacks with Fecon Power Management that deliver 65-105gpm.



Fecon® Stump Hog Pricing

Model	Hydraulic HP	Flow @ PSI	Wheel Diameter	Wheel # of Tools	Weight	Mount	Hoses	List Price
SH260-30*	75-100 hp	30 – 34.9 gpm	26"	32	1640 lbs.	Yes	Yes	\$15,630
SH260-35*	75-100 hp	35 – 39.9 gpm	26"	32	1640 lbs.	Yes	Yes	\$15,630
SH260-40*	75-100 hp	40 – 44.9 gpm	26"	32	1640 lbs.	Yes	Yes	\$15,630

Fecon® Excavator Stump Hog Pricing

Model	Wheel Diameter	Wheel # of Tools	Weight	Motor	Flow	Hoses	List Price
SH360-45**	36"	15	2500 lbs.	150 cc	40-50	No	\$38,500
SH360-61**	36"	15	2500 lbs.	150 cc	50-64	No	\$38,500
SH360-100**	36"	15	2600 lbs.	250 cc	95-105	No	\$43,200

NOTE:

1. *Cab controller is included.
2. **Bolt-on mounts specific to the excavator included.






Operator cab must be protected with properly maintained ½" LEXAN® glass or equal. Always ensure your carrier's safety features, including ROPs & FOPs, meet your job safety requirements.

Fecon® Stump Hog Pricing

The SHX30 Stumpex stump grinder mounts to excavators and skid steers, with as little as 20 gpm hydraulic output. The Stumpex' low RPM and 33,600 ft. per lb. of torque enables it to draw itself down into any species of stump. The 1,500 lb. Stumpex can draw into stumps 8" – 28" in diameter and up to 20" deep in a single pass. Larger diameter stumps are processed by making additional passes. A threaded cone and staggered AR500 cutting blades grind out stump and root material with minimal discharge. Low maintenance costs, high production, and less clean-up make the Stumpex a great opportunity for stump grinding contractors in land clearing, tree care, and municipal applications.

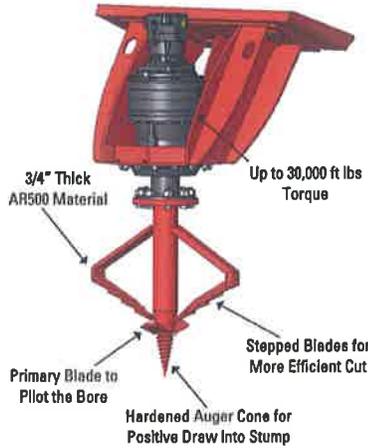

Flow	Speed	Depth /Min	Depth / Min
GPM	RPM	3/4" Bit	1" Bit
20	7.3	5.5"	7.3"
24	8.8	6.6"	8.8"
28	10.2	7.7"	10.2"
32	11.7	8.8"	11.7"
36	13.1	9.8"	13.1"
40	14.7	11"	14.8"
42	16.1	12.1"	16"

Fecon® Stumpex


Model	Mount	Bit Diameter	Weight	Flow Required	List Price
SHX30SS	SS	30"	1,500 lbs.	20 -42 gpm	\$19,900
SHX30EXC	removable	30"	Coming Soon	Coming Soon	Coming Soon

Safety is the responsibility of the operator.
 Prices and specifications subject to change without notice.
 Auxiliary equipment options or attachments not listed, may be quoted upon request.
 Certain guarding and features may have been removed for illustrative purpose, always run with proper guarding.



Fecon® Tree Shear Pricing

Fecon® offers two types of Tree Shears for Skid Steers, a Single Knife (FBS1400) and a Dual Knife (FBS1200 and FBS1500). Both are equipped with heavy duty cylinders and rods to provide strong shearing action and faster cycle times. They also feature a strong yet lighter weight frame, fitted with adjustable AR400 steel knives allowing you to grab more trees with a lower ground PSI. Fecon® offers four excavator tree shear models: FBS1200EXC, FBS1400EXC, FBS1500EXC, and the FBS1600EXC, each with varying cutting capacity diameters (12", 14", 15" and 16"). This range of tree shear models provides options for excavators from 8-16 tons. Whether you are reaching down a slope or across a gully, this is the excavator attachment to satisfy your entire tree felling needs. All four models are provided with the "H" style mounting bracket. The FBS1200, 1400, and 1500 can be made as dedicated excavator models or by ordering the excavator conversion kit that allows operating the shear on either a skid steer or an excavator. The FBS1600 is a dedicated excavator model.



Fecon® Skid Steer Tree Shear Pricing

Model	Weight	Max. Diameter	Flow Required	Part Number	List Price	No Upper Structure**
FBS1200SS – Dual Acting*	1250 lbs.	12"	15-20 gpm	-	\$12,650	\$8,720
FBS1400SS – Single Acting*	1800 lbs.	14"	15-20 gpm	-	\$13,560	\$9,050
FBSD1500SS – Dual Acting*	1900 lbs.	15"	15-23 gpm	-	\$15,570	\$11,100
Spray Option	10 - gallon capacity		-	-	\$1,350	n/a
Bobcat Option	Wiring harness to run from diverter valve to 7 pin connector. Will not work on older Bobcat models with 12 pin connector.			300-73-007 300-70-001 300-73-003	\$420	n/a

Fecon® Excavator Tree Shear Pricing

Excavator Tree Shear Kit	Weight	Description	List Price
Conversion Kit - SS to EXC	200 lbs.	Includes bolt-on mount specific to the excavator. Bolts to the FBS1200SS (8-10 ton)/ FBS1400SS (10-12 ton)/ FBS1500SS (10-12 ton) universal mounts. Also includes 24V diverter valve required for excavator application.	\$3,090

Model	Weight	Max Diameter	Flow Required	List Price
FBS1600EXC*** (12 - 16 ton)	3700 lbs.	16"	15-35 gpm	\$27,880
Lateral Tilt Option - For FBS1600EXC	40 degrees each side			\$9,020

NOTE:

- *Skid steer shears include 12V diverter valve for switch between grabber and accumulator function.
- **No upper structure means no grabber arms or accumulator arms, does include short push bar.
- ***Includes bolt-on mount.

Safety is the responsibility of the operator.

Prices and specifications subject to change without notice.

Auxiliary equipment options or attachments not listed, may be quoted upon request.

Certain guarding and features may have been removed for illustrative purpose, always run with proper guarding.

Fecon® Grapple Pricing

Fecon® offers two different lines of Grapples to fit your skid steers and tracked carriers. Grapples are the perfect forestry attachment for tree care and landscaping applications.

The Front Grapple is perfect for brush and tree removal, transporting, loading and placing logs and rocks with a skid steer. It offers a 60" opening, 360° rotation, and a load capacity of 8,990 lbs. It features a heavy duty frame for long term performance and heavily serrated contained plates to secure logs both perpendicular and parallel to the loader.

The Root Grapple was designed with a rigid frame and serrated AR400 front tines for ripping and grabbing. This grapple is excellent for clearing brush and removing debris and logs. The 41" depth, 72" length and 37" open clamp height make this grapple perfect for grabbing and holding awkward shaped material.



Fecon® Skid Steer Grapple Rake/ Bucket Grapple Pricing

Model	Weight	Width	List Price
FRG72	863 lbs.	72"	\$3,440
FBG72	850 lbs.	72"	\$3,440

Fecon® Skid Steer Front Grapple Pricing

Model	Weight	Lift Capacity	Opening	List Price	Grapple Only
FFG48	690 lbs.	6,600 lbs.	48"	\$7,820	Call
FFG60	800 lbs.	9,900 lbs.	60"	\$10,820	\$6,800
FFG72	850 lbs.	9,900 lbs.	72"	\$11,950	\$7,540

Winch Option:	Capacity	Cable	List Price
FGW1000*	10,000 lbs.	3/8 x 100	\$4,940

NOTE:

- *FGW1000 fits all skid steer front grapples.

Fecon® Milling Attachment Pricing

Fecon Milling Attachments are well suited to milling compacted soil, stumps, and roots, or to blend in stabilizing materials or additives to improve the soil. The Soil Hogs can also be used to fell and incorporate standing trees into the ground if desired. The soil hog is ideal for loosening top soil, milling fields of poplar stumps and roots in order to convert land back into tillable acres for alternative crops, reclaiming tillable acres from lost land due to encroaching tree lines or windbreaks, creating ideal planting beds at Christmas tree farms while milling tree stumps, or to incorporate organics back into the soil during rehabilitation of forest land following wildfire.

Rotor diameters range from 28"-40" and can mill 6"-20" deep, leaving a homogeneous mix of organic material in a light well aerated condition. PTO models are available at 110 to 440 horse power. The hydraulic powered FMA8039 can run from 400-600HP. Rotor direction can be configured to the type of carrier, primary direction of operation, and desired results. PTO models include an overrunning slip clutch and synchronized pivoting gear box that allow a broad range of motion to operate smoothly at various depths. The carbide tools effectively process wood and soil.



Model	Work Width IN/MM	Max Width IN/MM	Tool Qty.	Max Depth IN/MM	Exposed Rotor Depth IN/MM	Weight LBS/KG	HP Type	Min HP	Max HP	Debris Door	Roller	List Price
FMA8039GH-2	80/2000	112/2510	60	20/500	10/255	11900/4825	Hyd	300	600	Standard	NA	\$145,850
FMA8039BH-2	80/2000	112/2510	60	20/500	10/255	11900/4825	Hyd	300	600	Standard	NA	\$124,940
FMA8039GP	80/2000	112/2510	60	20/500	10/255	11900/4825	PTO	200	440	NA	Standard	\$124,940
FMA8039BP	80/2000	112/2510	60	20/500	10/255	11900/4825	PTO	200	440	NA	Standard	\$103,700
FMA8032 PTO	80/2000	98/2490	48	16/400	9/225	8050/3650	PTO	180	300	NA	Standard	\$93,910
FMA8028 PTO	80/2000	-	48	12/300	7.5/190	5950/2900	PTO	140	190	NA	Standard	\$56,740
FMA2628	26/650	-	16	7.5/190*	-	3680/1670	PTO	100	240	Standard	Optional	\$26,000
Compact Roller for FMA2628											Optional	\$1,600

NOTE:

1. Other options may be available.
2. PTO models require 1000 RPM PTO input speed.
3. *FMA2628 max depth with skid shoes is 5.3", and 7.5" with skid shoes removed.

Safety is the responsibility of the operator.
 Prices and specifications subject to change without notice.
 Auxiliary equipment options or attachments not listed, may be quoted upon request.
 Certain guarding and features may have been removed for illustrative purpose, always run with proper guarding.



Fecon® Price List Key

Bull Hog Skid Steer

- BH – Bull Hog
- SS – Skid Steer

Bull Hog® Hydraulic Ground

- BH – Bull Hog
- H – Hydraulic
- HYB - Hybrid
- SS – Skid Steer
- SD – Severe Duty
- CSD – Compact Severe Duty
- WPB – Weld-on Push Bar
- PPB – Pin-on Push Bar
- -1 – 2 x 63cc Motors
- -2 – 2 x 80cc Motors
- -3 – 2 x 107cc Variable Displacement Motors
- -4 – 2 x 160cc Variable Displacement Motors
- -5 – 2 x 250cc Variable Displacement Motors
- XD – 90mm rotor bearing and stub shafts
- V – Variable Displacement Motor

Bull Hog® PTO Pricing

- BH – Bull Hog
- P – Pivoting Gear Box
- X – Driveline Clutch Inside Head
- ST – Standard
- SD – Severe Duty
- PPB – Pin-on Push Bar
- HYB – Hydraulic Push Bar

Bull Hog® Excavator Pricing

- CEM – Compact Equipment Mulcher
- BH – Bull Hog
- EXC – Excavator

- -1 – Motor Configuration
- -2 – Motor Configuration
- -3 – Motor Configuration
- -4 – Motor Configuration
- V – Variable Displacement Motor
- SD – Severe Duty
- SDV – Severe Duty Variable Displacement
- XD – 90mm Rotor Bearing and Stub Shaft
- BHP – Bull Hog Power Pack

Tractors

- FTX – Fecon Tracked Carriers
- QD – Quick Disconnect
- L – Loader Arms
- FM – Forestry Mower
- SLGP – Super Low Ground Pressure
- RTF – rubber tire Fecon

Stump Hog

- SH – Stump Hog

Tree Shear

- FBS – Fecon Bunching Shear
- SS – Skid Steer
- EXC – Excavator

Grapple

- FRG – Fecon Root Grapple
- FBG – Fecon Bucket Grapple
- FFG – Fecon Front Grapple
- FGW – Fecon Grapple Winch

Deck Mower

- FRM – Fecon Rotary Mower





Fecon® Explorer Drill Pricing

Model	Description	Part Number	List Price
EX300S	Compact Rubber Tracked Drill Rig Equipped for Seismic Drilling	EX300S	\$196,600



EX300 Full Guarded – Package Pricing	List Price
EX300s with Brush Door and Platform Guarding	\$200,110

EX300S – Specifications

EX300S Specifications	
Engine	Kubota V2203 Diesel
Horse Power	46 hp / 34.3 kw
Ground Pressure	4.52 psi
Operating Weight	9876 lbs. / 4480 kg
Fuel Consumption	3.75 gph
Drill Depth Capacity	300 ft.

Air Compressor Specifications	
Engine	Kubota V3800 Diesel
Horse Power	99 hp / 73.8 kw
Air End	I-R Rotary Screw Type
Delivery	300 cfft./ 8.4m ³ / min
Pressure Rating	200 psi
Pressure Operating	170 psi

EX300S – Seismic Tooling Groups

Part Number	Description	List Price
EX300S-OPT-001	60 ft. Starter Tooling Group	\$7,130
EX300S-OPT-002	Add-On Tooling Group for Seismic	\$8,465

EX300S – Factory Installed Options

Part No.	Description	List Price
EX300S-OPT-003	Brush Door For Operator Station	\$1,160
EX300S-OPT-004	Brush Door Not Installed	\$615
EX300S-OPT-005	Seismic Guarding Package	\$2,350

Safety is the responsibility of the operator.
Prices and specifications subject to change without notice.
Auxiliary equipment options or attachments not listed, may be quoted upon request.
Certain guarding and features may have been removed for illustrative purpose, always run with proper guarding.





Fecon® Explorer Drill Series Information

60 ft Starter Tooling Group

Quantity	Group Includes	Part Number	List Price
3	Drill Rods 10ft Straight	416-90-002	\$343
1	Drill Rod 7 ft. Straight	416-90-035	\$300
2	Auger 10ft Hollow Stem	416-90-001	\$578
5	Bits 3 Wing Step	416-90-003	\$75
1	Air Hammer 3" (Mincon)	416-90-030	\$2,927
1	Ballistic Bit for Hammer 3 5/8"	416-90-033	\$418
1	Dome Bit for Hammer 3 5/8"	416-90-034	\$422
1	Adapter Sub Drill Rod to Hammer	416-90-040	\$285
1	Grease Brush	416-90-051	\$3
1	Pail Grease for Rod Joints	416-90-050	\$40
2	Hard Hats with Face Shields and Ear Protection	n/a	\$44
2	Safety Vests	n/a	\$12
2	Pair Gloves	n/a	\$0

Add-On Seismic Tooling Group

Quantity	Group Includes	Part Number	List Price
8	Drill Rods 10ft straight	416-90-002	\$343
8	Auger 10ft hollow stem	416-90-001	\$578
1	Drill Rod Sub 18" Straight	416-90-036	\$200
1	Auger 18" Hollow Stem	416-90-037	\$250
5	Bit 3 Wing Step	416-90-003	\$75

Safety is the responsibility of the operator.

Prices and specifications subject to change without notice.

Auxiliary equipment options or attachments not listed, may be quoted upon request.

Certain guarding and features may have been removed for illustrative purpose, always run with proper guarding.





Operator cab must be protected with properly maintained ½" LEXAN® glass or equal.
Always ensure your carrier's safety features, including ROPs & FOPs, meet your job safety requirements.

Fecon® EX55 Support Crawler

Model	Description	Part Number	List Price
EX55	Rubber Tracked Seismic Support Vehicle	EX55	\$69,100



EX55 – Specifications

EX55 Specifications	
Engine	Kubota V2203 Diesel
Horse Power	46 hp / 34.3 kw
Ground Pressure	4.52 psi
Operating Weight	5920 lbs. /
Fuel Consumption	2 gph
Track Drive	Hydrostatic
Payload Capacity	4700 lbs.

Safety is the responsibility of the operator.
Prices and specifications subject to change without notice.
Auxiliary equipment options or attachments not listed, may be quoted upon request.
Certain guarding and features may have been removed for illustrative purpose, always run with proper guarding.





Fecon® EX60

Model	Description	List Price
EX60	Utility Tracked Vehicle with Standard Flatbed*	\$62,590



EX60 – Specifications

EX60 Specifications	
Engine	Kubota V2203 46hp Diesel
Operating Weight (not load)	3880lb / 1760kg
Payload Capacity	6000lb / 2725kg
Gross Vehicle Weight Rating	10,680lb / 4847kg
Hydraulic Circuit Specifications (2)	2500psi/15gpm • 172bar/56lpm
Width at Tracks	61" / 1550mm
Length	136" / 3460mm
Height	92.5" / 2350mm
Standard Flatbed Length	74in / 1879mm

EX60 – Factory Installed Options

Part Number	Description	List Price
EX300-OPT-003	Brush Door Factory Installed	\$1,080
TBD	Protection Package Screens & Skid Plates	\$3,330
TBD	Long bed option 94 in / 2387mm	\$930
TBD	Rear Hitch Receiver	\$620
TBD	Skid Plates	\$1,390
TBD	Operator Protection Screen	\$1,950
TBD	Winch 10,000 Electric winch	\$2,100

NOTE:

- *EX60 Vehicle includes carrier with standard flatbed installed only. Additional equipment or attachments are not included but can be installed by Fecon Service department at additional charge.
- Second photo: EX60 shown with sprayer unit furnish by customer on optional long bed.

Safety is the responsibility of the operator.

Prices and specifications subject to change without notice.

Auxiliary equipment options or attachments not listed, may be quoted upon request.

Certain guarding and features may have been removed for illustrative purpose, always run with proper guarding.





Operator cab must be protected with properly maintained ½" LEXAN® glass or equal.
Always ensure your carrier's safety features, including ROPs & FOPs, meet your job safety requirements.

Fecon® Geothermal Drill Series Pricing

Model	Description	Part Number	List Price
GL300	Compact Rubber Tracked Drill Rig Equipped for Geothermal Drilling	GL300	\$196,600



GL300 – Specifications

GL300 Specifications		Air Compressor Specifications	
Engine	Kubota V2203 Diesel	Engine	Kubota V3800 Diesel
Horse Power	46 hp / 34.3 kw	Horse Power	99 hp / 73.8 kw
Ground Pressure	4.52 psi	Air End	I-R Rotary Screw Type
Operating Weight	10379 lbs. / 4708 kg	Delivery	300 cfm / 8.4m ³ / min
Fuel Consumption	3.75 gph	Pressure Rating	200 psi
Drill Depth Capacity	300 ft.	Pressure Operating	170 psi

GL300 – Geothermal Tooling Groups

Description	Part Number	List Price
200 ft. Starter Tooling Group	GL300-OPT-001	\$13,605
Add-On Tooling Group for Geothermal	GL300-OPT-002	\$5,040

GL300 – Geothermal Add On Tooling Group

Model	Description	Part Number	List Price
GL14GH	Grout System Trailer (T14, GB580 & HR500)	GL300-OPT-003	\$23,050
GL14GHM	Grout + Mud System Trailer (T14, GB580, HR500 & MB300)	GL300-OPT-004	\$36,100
T14	14 ft. Trailer-Single Axle 3500 GVWR (for above systems)	416-90-059	\$3,810
GB580	Grout Boy (Stand-alone skid mount)	416-90-008	\$16,475
HR500	Hose Reel for Grout Hose (Hydraulic 500' cap./skid mount)	416-90-009	\$4,345
MB300	Mud Boy System (Powered by GB580 Grout Boy)	416-90-056	\$12,220
HT14E	Equipment Trailer-2 Axle 14,000 GVWR (Electric Brakes)	416-90-057	\$5,500
HT14H	Equipment Trailer-2 Axle 14,000 GVWR (Hyd. Surge Brakes)	416-90-058	\$6,200

Safety is the responsibility of the operator.

Prices and specifications subject to change without notice.

Auxiliary equipment options or attachments not listed, may be quoted upon request.

Certain guarding and features may have been removed for illustrative purpose, always run with proper guarding.



Effective March 1st, 2016

Page 28



Fecon® Geothermal Drill Series Information

200 ft Starter Tooling Group

Quantity	Group Includes	Part Number	List Price
20	Drill Rods 10ft Straight	416-90-002	\$343
1	Drill Rod 7 ft. Straight	416-90-035	\$300
2	Auger 10ft Hollow Stem	416-90-001	\$578
10	Bits 3 Wing Step	416-90-003	\$75
1	Air Hammer 3" (Mincon)	416-90-030	\$2,927
1	Ballistic Bit for Hammer 3 5/8"	416-90-033	\$418
1	Dome Bit for Hammer 3 5/8"	416-90-034	\$422
1	Adapter Sub Drill Rod to Hammer	416-90-040	\$285
1	Grease Brush	416-90-051	\$3
1	Pail Grease for Rod Joints	416-90-050	\$40
2	Hard Hats with Face Shields and Ear Protection	n/a	\$44
2	Safety Vests	n/a	\$12
2	Pair Gloves	n/a	\$0

Add-On Geothermal Tooling Group

Quantity	Group Includes	Part Number	List Price
10	Drill Rods 10ft straight	416-90-002	\$343
2	Auger 10ft hollow stem	416-90-001	\$578
1	Drill Rod Sub 18" Straight	416-90-036	\$200
1	Auger 18" Hollow Stem	416-90-037	\$250

Safety is the responsibility of the operator.

Prices and specifications subject to change without notice.

Auxiliary equipment options or attachments not listed, may be quoted upon request.

Certain guarding and features may have been removed for illustrative purpose, always run with proper guarding.





Orbit Screens Pricing

Model 68B Pricing: \$69,290.00

Specifications	
Series	60
Screening Plant Model	68A
Engine	Water Cooled Diesel Engine
Horse Power	26 hp
Hopper/Feeder	1.8 Cubic Yard
Weight	7,985 Lbs.
Belt Type Overs Conveyor	13 Ft. x 20 Inches
Belt Type Fines Conveyor	20 Ft. x 30 Inches
Leveling	Three Point Hydraulic Leveling

Options	Price
3/8" Openings Standard Wire	\$3,350
1/2" Openings Standard Wire	\$3,350
5/8" Openings Standard Wire	\$3,350
3/4" Openings Standard Wire	\$3,350
1" Openings Standard Wire	\$3,350
1 ¼" Openings Standard Wire	\$3,350
1/2" Openings Heavy Wire	\$3,350
5/8" Openings Heavy Wire	\$3,350
3/4" Openings Heavy Wire	\$3,350
1" Openings Heavy Wire	\$3,350
1 ¼" Openings Heavy Wire	\$3,350
1 ½" Openings Heavy Wire	\$3,350

Options	Price
Brush Package	\$2,775
Hopped Liner Package	\$1,825
Fines Conveyor Rock Seal	\$890
Hopper Extension Kit	\$2850
Electric in lieu of Diesel	Call Fecon

Model 60B Pricing: \$9,495.00

Specifications	
Series	60
Screening Plant Model	60 B
Weight	1,682 lbs.

Options	
13 HP Power Pack Engine	\$3,595.00
End Gate and Cutoff Blade	\$5,775
26 HP Power Pack	\$5,775

Safety is the responsibility of the operator.
 Prices and specifications subject to change without notice.
 Auxiliary equipment options or attachments not listed, may be quoted upon request.
 Certain guarding and features may have been removed for illustrative purpose, always run with proper guarding.

